



PROJECT: TYPE:

LOCATION: CAT:



Description

Connect multiple Trulux receivers via RF signal and integrate an existing WiFi network for ultimate lighting control. This control system is expandable up to 8 zones when using the Trulux Mobile App, allowing paired zones to perform seamlessly.

Features

- Converts WiFi signal to RF signal for 2-8 zones
- For use with the Trulux App
- Includes 5V DC wall power converter with 4ft cord and 6.5ft ethernet cable
- Requires Trulux RF receiver (REC-5A-4Z-WiFi)

Mounting

Set upon table-top or wall-mount via screws

Applications

Converts WiFi signal to RF signal for 2-8 zones for Trulux tape light

Warranty

3 years


Technical Information



Voltage	5V DC Operation (Includes wall power converter)
Frequency	2.4G
Output	RF Signal
Rating	RoHS Compliant, dry location


Dimensions

3-11/32"L
(84.7mm)

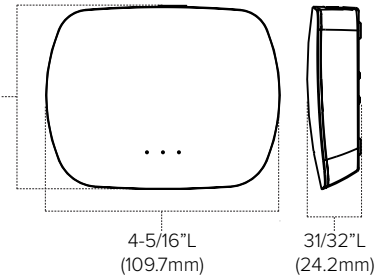

4-5/16"L
(109.7mm)

31/32"L
(24.2mm)

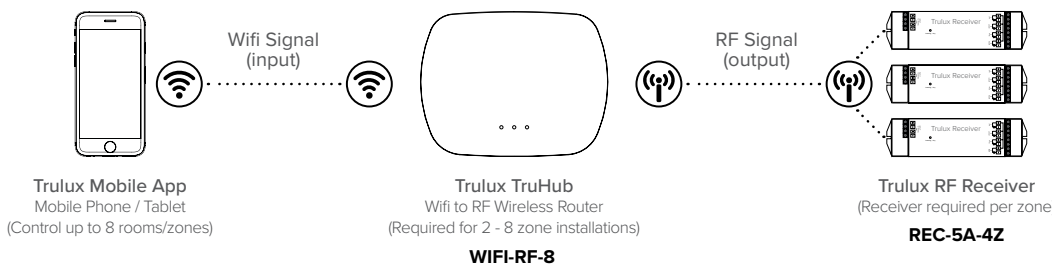

Ordering Information

Trulux WiFi Hub



WiFi-RF-8 includes:

(1) Trulux WiFi Hub
(requires Trulux RF receiver REC-5A-4Z-WiFi)

Example Part # **WiFi-RF-8**

